


efficiency curve for discharging (DC -> AC)


MultiPlus-II 48/5000/70-50

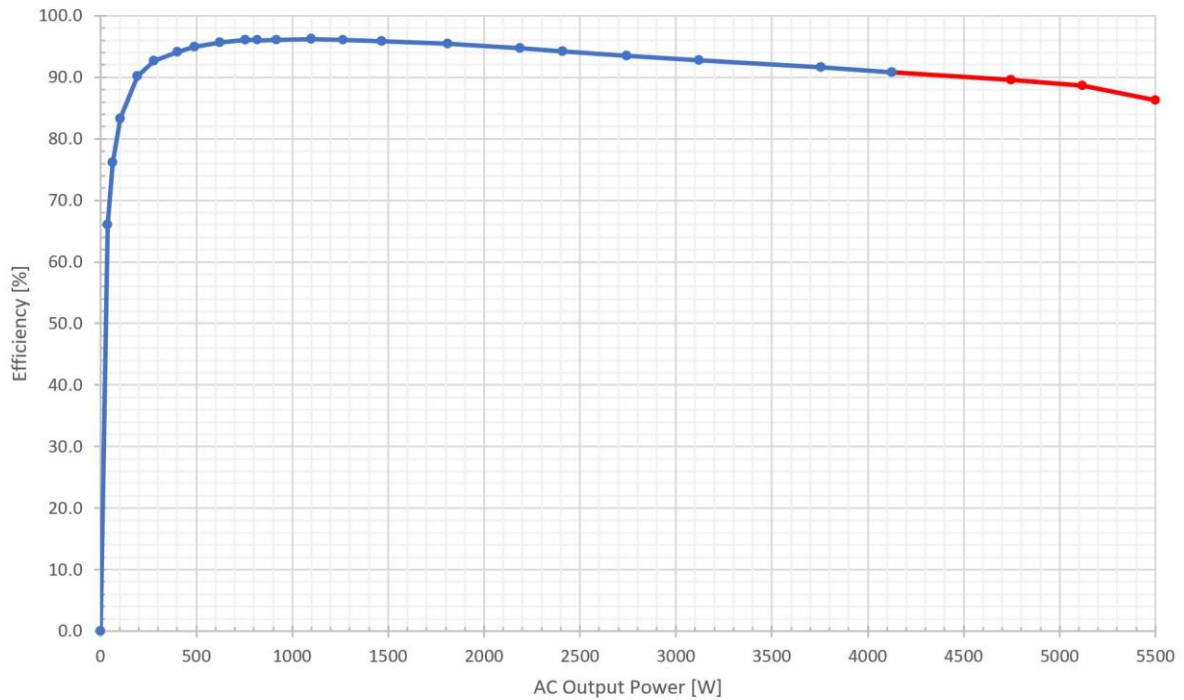

- Entladen Grundlast 350 W → 0,93
- Entladen Maximallast 3,6 kW → 0,92
- Entladen dazwischen → bis zu 0,96

efficiency curve for charging (AC -> DC)

MultiPlus-II 48/5000/70-50

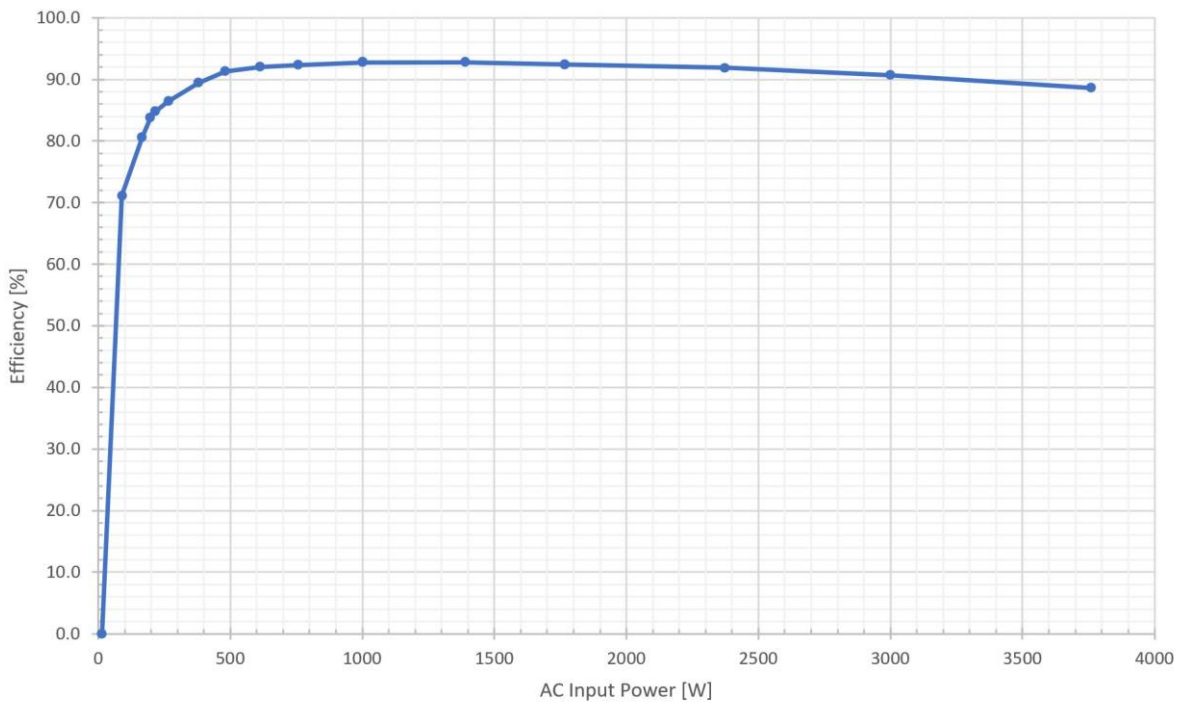

Laden 3,6 kW → 0,89

worst case: $0,93 * 0,89 = 0,83$ → 17 % Verluste

Quelle: <https://community.victronenergy.com/questions/56351/multiplus-485000-efficiency-curve.html>